


Standard timber

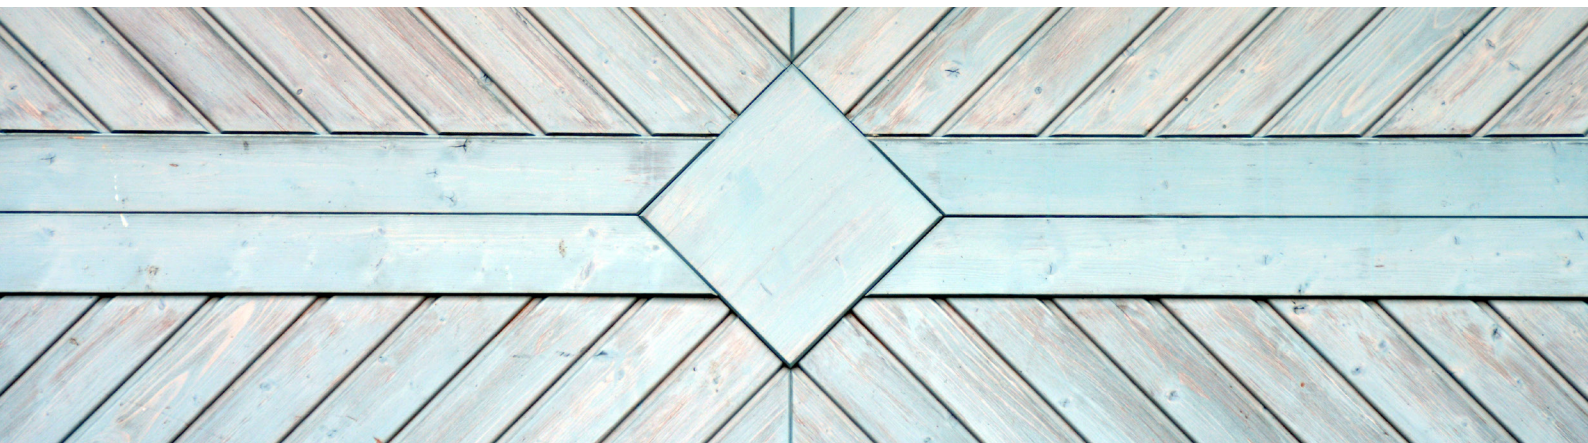

Centre cuts, redwood

Standard timber in redwood is used in several applications depending on which market they are destined for. A big share of the standard timber is used in the joinery sector to produce windows, doors, panels, floors etc. All standard products are dried to 18% moisture content.

| Thickness (mm) | Width (mm) | Length (m) | Species | Qualities |
|----------------|---------------------------------|------------|------------------|------------------------------------|
| 75 | 100/125/150 | 3.3 - 5.4 | Pinus silvestris | U/S / V / VI / VII / SF1-5 / SF1-6 |
| 50 | 100/115/125/150/175/200/225/250 | 3.3 - 5.4 | Pinus silvestris | U/S / V / VI / VII / SF1-5 / SF1-6 |
| 47 | 100/125/150 | 3.3 - 5.4 | Pinus silvestris | U/S / V / VI / VII / SF1-5 / SF1-6 |
| 44 | 100/150 | 3.3 - 5.4 | Pinus silvestris | U/S / V / VI / VII / SF1-5 / SF1-6 |
| 38 | 100/115/125/150/200/225 | 3.3 - 5.4 | Pinus silvestris | U/S / V / VI / VII / SF1-5 / SF1-6 |
| 32 | 100/150/175/200/225 | 3.3 - 5.4 | Pinus silvestris | U/S / V / VI / VII / SF1-5 / SF1-6 |

Sideboards, redwood

Standard timber sideboards in redwood is used in several applications depending on which market they are destined for. A big share of the sideboards are used in the joinery sector to produce mouldings and skirting boards and some are used in the pallet and packaging industry. All standard products are dried to 18% moisture content.

| Thickness (mm) | Width (mm) | Length (m) | Species | Qualities |
|----------------|----------------------------|------------|------------------|------------------------------------|
| 25 | 75/100/125/150/175/200/225 | 3.3 - 5.4 | Pinus silvestris | U/S / V / VI / VII / SF1-5 / SF1-6 |
| 19 | 100/125/150 | 3.3 - 5.4 | Pinus silvestris | U/S / V / VI / VII / SF1-5 / SF1-6 |
| 16 | 75/100 | 3.3 - 5.4 | Pinus silvestris | U/S / V / VI / VII / SF1-5 / SF1-6 |

Centre cuts, whitewood

Standard timber in whitewood is mainly used for planing. The main end use for the planed products are outdoor cladding and stress graded products for construction.

| Thickness (mm) | Width (mm) | Length (m) | Species | Qualities |
|----------------|-------------------------|------------|-------------|--------------|
| 47 | 125/150/175/200/225/250 | 3.6 - 6.0 | Picea abies | SF 1-6 / VII |

Sideboards, whitewood

Sideboards are mainly used for construction (roof boards, laths) and pallet and packaging.

| Thickness (mm) | Width (mm) | Length (m) | Species | Qualities |
|----------------|-------------|------------|-------------|--------------|
| 36 | 100/150/175 | 3.6 - 6.0 | Picea abies | SF 1-6 / VII |
| 25 | 125/150/175 | 3.6 - 6.0 | Picea abies | SF 1-6 / VII |
| 22 | 100/125/150 | 3.6 - 6.0 | Picea abies | SF 1-6 / VII |
| 19 | 100 | 3.6 - 6.0 | Picea abies | SF 1-6 / VII |
| 16 | 75/100 | 3.6 - 6.0 | Picea abies | SF 1-6 / VII |